

## Test report

T-25673966-10-R1



Verify Report

### Overall result

Pass

Please refer to the following pages for test result summary and notes.

### Client information

Client: Polyconcept GBS  
Address: Zhongshan Wanbo International Center, Room 301-303, No.666 West Huaihai Road, Changning District, Shanghai, 200052, China



### Sample information

Description: Caribou Drift RPET 9 Can Cooler/Caribou RPET 6 Can Cooler/Glacial RPET Backpack Cooler

Article no.: 3750-94BG,LBL,NY,3750-93BG,  
LBL,NY,3750-96BK,CR

Purchase order number: 01001302 1 1  
01001303 1 1  
01001304 1 1  
01001298 1 1  
01001299 1 1  
01001300 1 1  
X1001370 2 1  
X1001370 1 1

Factory no: 14175

Vendor no.: 11910

Country of origin: Cambodia

Country of distribution: Canada, United States

Quantity submitted: 2 pcs per style + a lot parts

Toy Co./agency:

Labeled age grade: -

Requested age grade:

Tested age grade: -



Verify Report



## General information

Sample receipt date: 03-Nov-2025

Report date: 14-Nov-2025

Testing period: 06-Nov-2025 to 14-Nov-2025

QIMA (Hangzhou) Testing Co., Ltd.

Carina Zhou

Textile Laboratory Manager

QIMA (Hangzhou) Testing Co., Ltd.

Jeremy Xu

Chemical Laboratory Manager





## Result summary

At the request of the client, the following test were conducted:

Test(s) conducted	Conclusion
CPSIA Section 101 & 16 CFR 1303, Total Lead in Paints and Surface Coatings	Pass
California Proposition 65, Total Lead in Paints and Surface Coatings	Pass
California Proposition 65, Total Lead in Substrate Materials	Pass
Canadian Surface Coating Materials Regulations SOR/2016-193, Total Lead in Stickers, Films and Surface Coating Materials	Pass
Client's requirement, Bisphenol A content	Pass
Client-Chemical Requirements -Colorado House bill 22-1345, Per-and Polyfluoroalkyl Substances (PFAS) Content (Total Organic Fluorine Method)	Pass
California AB 1817, Per-and Polyfluoroalkyl Substances (PFAS) Content (Total Organic Fluorine Method)	Pass
Client's Requirement, Phthalates content	Pass
FDA 21 CFR 177.1350, Ethylene-Vinyl Acetate Copolymers	Pass
SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile	Pass
19 CFR 134.11-Country of Origin-Labeling Review	Pass





## Detailed results

### CPSIA Section 101 & 16 CFR 1303, Total Lead in Paints and Surface Coatings

Test Method: CPSC-CH-E1003-09.1  
Analytical Method: Inductively Coupled Plasma-Optical Emission Spectrometry

Specimen No.	C13	C19+C24+C28	---	---	---	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	---	---	---	90
<b>Conclusion</b>	Pass	Pass	---	---	---	

**Note:**

mg/kg = Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 10 mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.





## Detailed results

### California Proposition 65, Total Lead in Paints and Surface Coatings

Test Method: CPSC-CH-E1003-09.1  
Analytical Method: Inductively Coupled Plasma-Optical Emission Spectrometry

Specimen No.	C13	C19+C24+C28	---	---	---	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	---	---	---	90
<b>Conclusion</b>	Pass	Pass	---	---	---	

**Note:**

mg/kg =Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 10mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.

**Remark:**

The specification is quoted from client's requirement.

**Data Consolidation Reference:**

Specimen No.	Transferred from		Date of Issue
	Report No.	Specimen No.	
C13	T-25674037-10-R1	C15	10-Nov-2025





## Detailed results

### California Proposition 65, Total Lead in Substrate Materials

Test Method: CPSC-CH-E1001-08.3 (Metal), CPSC-CH-E1002-08.3 (Non-Metal)  
Analytical Method: Inductively Coupled Plasma-Optical Emission Spectrometry

Specimen No.	C1+C2+C3	C4+C7+C9	C5+C11	C6	C8+C26+C30	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	ND	26	ND	100
<b>Conclusion</b>	Pass	Pass	Pass	Pass	Pass	

Specimen No.	C10+C16	C12	C14+C17+C18	C15+C22	C20	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	ND	ND	12	100
<b>Conclusion</b>	Pass	Pass	Pass	Pass	Pass	

Specimen No.	C21+C27+C29	C23+C32	C25	C31	---	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	18	ND	---	100
<b>Conclusion</b>	Pass	Pass	Pass	Pass	---	

**Note:**

mg/kg =Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 10 mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.

**Remark:**

The specification is quoted from client's requirement.





## Detailed results

### Canadian Surface Coating Materials Regulations SOR/2016-193, Total Lead in Stickers, Films and Surface Coating Materials

Test Method: ASTM F963-23  
Analytical Method: Inductively Coupled Plasma-Optical Emission Spectrometry

Specimen No.	C13	C19+C24+C28	---	---	---	Total Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Total Lead (Pb)	ND	ND	---	---	---	90
<b>Conclusion</b>	Pass	Pass	---	---	---	

**Note:**

mg/kg=Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit =10 mg/kg)





## Detailed results

### Client's requirement, Bisphenol A content

Test Method: In-House Method

Analytical Method: Liquid Chromatography-Mass Spectrometer Mass Spectrometer (LC-MS/MS)

Specimen No.	C11	---	---	---	Client's limit (mg/kg)
Test Item	CAS No.	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Bisphenol A (BPA)	80-05-7	ND	---	---	<b>Not Detected</b>
<b>Conclusion</b>		Pass	---	---	

**Note:**

mg/kg=milligram per kilogram

ND=Not Detected(Reporting limit = 1.0mg/kg)





## Detailed results

### Client-Chemical Requirements -Colorado House bill 22-1345, Per-and Polyfluoroalkyl Substances (PFAS) Content (Total Organic Fluorine Method)

Test Method: With reference to EN 14582:2016 and aqueous extraction method.  
Analytical Method: Ion Chromatography

Specimen No.	C1	C2	C3	C15	Client Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Per- and polyfluoroalkyl substances (PFAS) (as total organic fluorine)	28	22	ND	ND	100*
<b>Conclusion</b>	Pass	Pass	Pass	Pass	

Specimen No.	C22	C23	C32	---	Client Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Per- and polyfluoroalkyl substances (PFAS) (as total organic fluorine)	ND	22	ND	---	100*
<b>Conclusion</b>	Pass	Pass	Pass	---	

**Note:**  
 mg/kg (Milligrams per kilogram) = ppm (Parts per million) = 0.0001 % w/w (Percent by weight)  
 LT = Less than  
 ND = Not Detected (Reporting Limit = 20 mg/kg)  
 NA = Not applicable  
 NT = Not tested  
 The result is calculated by the subtraction of total fluorine content by inorganic fluorine content determined by aqueous extraction.

**Remark:**  
 \* The presence of PFAS in a product or product component at or above the following thresholds, as measured in total organic fluorine:  
 (A) Commencing January 1, 2025, 100 parts per million.  
 (B) Commencing January 1, 2027, 50 parts per million.





## Detailed results

### California AB 1817, Per-and Polyfluoroalkyl Substances (PFAS) Content (Total Organic Fluorine Method)

Test Method: With reference to EN 14582:2016 and aqueous extraction method.  
Analytical Method: Ion Chromatography

Specimen No.	C1	C2	C3	C15	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Per- and polyfluoroalkyl substances (PFAS) (as total organic fluorine)	28	22	ND	ND	100*
<b>Conclusion</b>	Pass	Pass	Pass	Pass	

Specimen No.	C22	C23	C32	---	Limit (mg/kg)
Test Item	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Per- and polyfluoroalkyl substances (PFAS) (as total organic fluorine)	ND	22	ND	---	100*
<b>Conclusion</b>	Pass	Pass	Pass	---	

**Note:**  
 mg/kg (Milligrams per kilogram) = ppm (Parts per million) = 0.0001 % w/w (Percent by weight)  
 LT = Less than  
 ND = Not Detected (Reporting Limit = 20 mg/kg)  
 NA = Not applicable  
 NT = Not tested  
 The result is calculated by the subtraction of total fluorine content by inorganic fluorine content determined by aqueous extraction.

**Remark:**  
 \* The presence of PFAS in a product or product component at or above the following thresholds, as measured in total organic fluorine:  
 (A) Commencing January 1, 2025, 100 parts per million.  
 (B) Commencing January 1, 2027, 50 parts per million.





## Detailed results

### Client's Requirement, Phthalates content

Test Method: CPSC-CH-C1001-09.4  
Analytical Method: Gas Chromatography with Mass Spectrometry

Specimen No.		C1+C2+C3	C5+C11	C8+C26+C30	C10+C16	Limit (mg/kg)
Test Item	CAS No.	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Dibutyl phthalate (DBP)	84-74-2	ND	ND	ND	ND	1000
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	ND	ND	1000
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	ND	ND	1000
Diisononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	ND	ND	1000
Diisodecyl phthalate (DIDP)	26761-40-0 68515-49-1	ND	ND	ND	ND	1000
Di-n-octyl phthalate (DnOP)	117-84-0	ND	ND	ND	ND	1000
Di-n-hexyl phthalate (DHEXP / DnHP)	84-75-3	ND	ND	ND	ND	1000
Dicyclohexyl phthalate (DCHP)	84-61-7	ND	ND	ND	ND	1000
Diisobutyl phthalate (DIBP)	84-69-5	ND	ND	ND	ND	1000
Di-n-pentyl phthalate (DPENP)	131-18-0	ND	ND	ND	ND	1000
<b>Conclusion</b>		Pass	Pass	Pass	Pass	

**Note:**

mg/kg = Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 50 mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.





## Detailed results

### Client's Requirement, Phthalates content

Test Method: CPSC-CH-C1001-09.4  
Analytical Method: Gas Chromatography with Mass Spectrometry

Specimen No.		C12	C13	C15+C22	C19+C24+C28	Limit (mg/kg)
Test Item	CAS No.	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Dibutyl phthalate (DBP)	84-74-2	ND	ND	ND	ND	1000
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	ND	ND	1000
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	ND	ND	1000
Diisononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	ND	ND	1000
Diisodecyl phthalate (DIDP)	26761-40-0 68515-49-1	ND	ND	ND	ND	1000
Di-n-octyl phthalate (DnOP)	117-84-0	ND	ND	ND	ND	1000
Di-n-hexyl phthalate (DHEXP / DnHP)	84-75-3	ND	ND	ND	ND	1000
Dicyclohexyl phthalate (DCHP)	84-61-7	ND	ND	ND	ND	1000
Diisobutyl phthalate (DIBP)	84-69-5	ND	ND	ND	ND	1000
Di-n-pentyl phthalate (DPENP)	131-18-0	ND	ND	ND	ND	1000
<b>Conclusion</b>		Pass	Pass	Pass	Pass	

**Note:**

mg/kg = Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 50 mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.

Data Consolidation Reference:

Specimen No.	Transferred from		Date of Issue
	Report No.	Specimen No.	
C13	T-25674037-10-R1	C15	10-Nov-2025





## Detailed results

### Client's Requirement, Phthalates content

Test Method: CPSC-CH-C1001-09.4  
Analytical Method: Gas Chromatography with Mass Spectrometry

Specimen No.	C23+C32	C31	---	---	Limit (mg/kg)
Test Item CAS No.	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	Result (mg/kg)	
Dibutyl phthalate (DBP) 84-74-2	ND	ND	---	---	1000
Benzyl butyl phthalate (BBP) 85-68-7	ND	ND	---	---	1000
Di-(2-ethylhexyl) phthalate (DEHP) 117-81-7	ND	ND	---	---	1000
Diisononyl phthalate (DINP) 28553-12-0 68515-48-0	ND	ND	---	---	1000
Diisodecyl phthalate (DIDP) 26761-40-0 68515-49-1	ND	ND	---	---	1000
Di-n-octyl phthalate (DnOP) 117-84-0	ND	ND	---	---	1000
Di-n-hexyl phthalate (DHEXP / DnHP) 84-75-3	ND	ND	---	---	1000
Dicyclohexyl phthalate (DCHP) 84-61-7	ND	ND	---	---	1000
Diisobutyl phthalate (DIBP) 84-69-5	ND	ND	---	---	1000
Di-n-pentyl phthalate (DPENP) 131-18-0	ND	ND	---	---	1000
<b>Conclusion</b>	Pass	Pass	---	---	

**Note:**

mg/kg = Milligrams per kilogram

LT = Less than

ND = Not detected (Reporting Limit = 50 mg/kg)

Composite results are based on specimen of least mass resulting in highest potential concentration.





## Detailed results

### FDA 21 CFR 177.1350, Ethylene-Vinyl Acetate Copolymers

Test Method: FDA 21 CFR 177.1350

Specimen No.		C11	RL	Limit	
Test Item	Test Condition				Result
	Temp.	Duration			
Distilled water extractive (mg/in <sup>2</sup> )	120°F	24 hours	ND	<b>0.1</b>	<b>0.5</b>
n-Heptane extractive (mg/in <sup>2</sup> )	70°F	0.5 hours	ND	<b>0.1</b>	<b>0.5</b>
8% Ethanol extractive (mg/in <sup>2</sup> )	120°F	24 hours	ND	<b>0.1</b>	<b>0.5</b>
50% Ethanol extractive (mg/in <sup>2</sup> )	120°F	24 hours	ND	<b>0.1</b>	<b>0.5</b>
<b>Conclusion</b>			Pass		

**Note:**

Temp. = Temperature

°F = Degree Fahrenheit

mg/in<sup>2</sup> = Milligrams per square inch

LT = Less than

ND = Not detected. Result value is less than reporting limit (RL).

**Remark:**

The specification is quoted from 21 CFR 177.1350 (b) (1).





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T1-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T1-Black non-woven fabric interlayer				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	11.2	-	-	-	>3.5s
(2)	11.1	-	-	-	
(3)	11.7	-	-	-	
(4)	12.0	-	-	-	
(5)	11.7	-	-	-	
(Avg.)	11.5	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T2-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T2-Black non-woven fabric interlayer				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	11.4	-	-	-	>3.5s
(2)	11.5	-	-	-	
(3)	11.8	-	-	-	
(4)	11.0	-	-	-	
(5)	11.9	-	-	-	
(Avg.)	11.5	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T3-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T3-Black non-woven fabric interlayer				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	11.0	-	-	-	>3.5s
(2)	11.8	-	-	-	
(3)	10.9	-	-	-	
(4)	11.5	-	-	-	
(5)	11.7	-	-	-	
(Avg.)	11.4	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T4-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T4-Pocket lining				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	8.2	-	-	-	>3.5s
(2)	8.2	-	-	-	
(3)	8.4	-	-	-	
(4)	8.4	-	-	-	
(5)	8.3	-	-	-	
(Avg.)	8.3	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T5-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T5-Pocket lining				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	8.1	-	-	-	>3.5s
(2)	8.1	-	-	-	
(3)	8.4	-	-	-	
(4)	8.0	-	-	-	
(5)	8.4	-	-	-	
(Avg.)	8.2	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T6-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T6-Pocket lining				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	8.4	-	-	-	>3.5s
(2)	8.6	-	-	-	
(3)	8.5	-	-	-	
(4)	8.5	-	-	-	
(5)	8.5	-	-	-	
(Avg.)	8.5	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	DNI	>3.5s
(2)	-	-	-	DNI	
(3)	-	-	-	DNI	
(4)	-	-	-	DNI	
(5)	-	-	-	DNI	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

DNI = Did not ignite;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Bottom				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	DNI	>3.5s
(2)	-	-	-	DNI	
(3)	-	-	-	DNI	
(4)	-	-	-	DNI	
(5)	-	-	-	DNI	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

DNI = Did not ignite;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Side mesh				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Back mesh				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Black non-woven fabric interlayer				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	11.4	-	-	-	>3.5s
(2)	11.0	-	-	-	
(3)	10.9	-	-	-	
(4)	11.7	-	-	-	
(5)	10.8	-	-	-	
(Avg.)	11.2	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T7-Pocket lining				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	8.2	-	-	-	>3.5s
(2)	8.1	-	-	-	
(3)	8.4	-	-	-	
(4)	8.0	-	-	-	
(5)	8.3	-	-	-	
(Avg.)	8.2	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Shell				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	DNI	>3.5s
(2)	-	-	-	DNI	
(3)	-	-	-	DNI	
(4)	-	-	-	DNI	
(5)	-	-	-	DNI	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

DNI = Did not ignite;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Bottom				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	DNI	>3.5s
(2)	-	-	-	DNI	
(3)	-	-	-	DNI	
(4)	-	-	-	DNI	
(5)	-	-	-	DNI	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### **Burn Code Description:**

DNI = Did not ignite;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Side mesh				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Back mesh				Face Length
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	-	-	-	IBE	>3.5s
(2)	-	-	-	IBE	
(3)	-	-	-	IBE	
(4)	-	-	-	IBE	
(5)	-	-	-	IBE	
(6)	-	-	-	IBE	
(7)	-	-	-	IBE	
(8)	-	-	-	IBE	
(9)	-	-	-	IBE	
(10)	-	-	-	IBE	
Conclusion	Pass				

\* Dry-cleaning / Laundering procedure is according to Commercial Dry Cleaning / CAN/CGSB-4.2 No.58-2019, Procedure 5, Dry Procedure D1; Moderate mechanical action at 50°C, Synthetic detergent, Tumble dry normal.

#### Burn Code Description:

IBE = Ignited but extinguished;





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Black non-woven fabric interlayer				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	11.3	-	-	-	>3.5s
(2)	10.8	-	-	-	
(3)	11.7	-	-	-	
(4)	10.9	-	-	-	
(5)	11.1	-	-	-	
(Avg.)	11.2	-	-	-	
Conclusion	Pass				





## Detailed results

### SOR/2016-194-Textile Flammability Regulations-Non-bedding Textile

Test Method: CAN/CGSB-4.2 No.27.5-2023

Specimen No.	T8-Pocket lining				
Preliminary Tests	<u>Fabric Surface</u>	Smooth	<u>Test Specimen Direction</u>		Face Length
Items	Result				Client's requirement
	<u>As Received</u>		<u>After Dry-cleaning and Laundering*</u>		
	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	<u>Flame Spread (sec.)</u>	<u>Burn Code</u>	
(1)	8.3	-	-	-	>3.5s
(2)	8.2	-	-	-	
(3)	8.2	-	-	-	
(4)	8.6	-	-	-	
(5)	8.7	-	-	-	
(Avg.)	8.4	-	-	-	
Conclusion	Pass				

### 19 CFR 134.11-Country of Origin-Labeling Review

Test Parameters	Observation	Conclusion
Country of Origin	Present on product and is visible to the consumer at the point of sale.	Pass





## Specimen description

Specimen #	Specimen description	Location
C1	Light grey textile with PU backing	3750-94BG-main body/base/pocket/3750-93BG-main body/pocket
C2	Light blue textile with PU backing	3750-94LBL-main body/base/pocket/3750-93LBL-main body/pocket
C3	Navy textile with PU backing	3750-94NY-main body/base/pocket/3750-93NY-main body/pocket
C4	Black textile	3750-94BG/LBL/NY/3750- 93BG/LBL/NY-zipper cloth
C5	Black soft plastic	3750-94BG/LBL/NY/3750- 93BG/LBL/NY-zipper teeth
C6	Silvery metal	3750-94BG/LBL/NY/3750- 93BG/LBL/NY-zipper head
C7	Black/white textile	3750-94BG/LBL/NY/3750- 93BG/LBL/NY/3750-96BK/CR-zipper puller string
C8	Black plastic	3750-94BG/LBL/NY-buckle shell/buckle pin/3750-93BG/LBL/NY- fixed buckle/adjustable buckle/3750- 96BK/CR-adjustable buckle
C9	Black textile	3750-94BG/LBL/NY-straps/3750- 93BG/LBL/NY-straps/handle/3750- 96BK/CR-handle/handle belt/adjustable straps/fixed belt
C10	Black textile with elastic band	3750-94BG/LBL/NY-elastic of straps
C11	Grey soft plastic	3750-94BG/LBL/NY/3750- 93BG/LBL/NY/3750-lining/96BK/CR- lining/top lining
C12	Black coated white label	3750-94BG/LBL/NY/3750- 93BG/LBL/NY/3750-96BK/CR- big/small label
C13	Black ink	3750-94BG/LBL/NY/3750- 93BG/LBL/NY-raw material-zipper head/3750-96CR-raw material- main/front pocket zipper head
C14	Grey textile	3750-93BG/LBL/NY-pocket belt
C15	Black textile with PU backing	3750-93BG/LBL/NY/3750-96BK/CR- front pocket lining
C16	Black textile with elastic band	3750-96BK/CR-mesh pocket elastic
C17	Black mesh hole textile	3750-96BK/CR-mesh pocket/back/straps back
C18	Black textile	3750-96BK/CR-back edge





## Specimen description


Specimen #	Specimen description	Location
C19	Black ink	Raw material-3750-96BK/CR-cap
C20	Dull silvery metal	3750-96BK/CR-cap/stud/prong/socket
C21	Black textile	3750-96BK/CR-lining edge/top lining edge
C22	Black textile with black PU backing	3750-96BK/CR-front pocket base/base
C23	Black textile with black PVC backing	3750-96BK-main body/front pocket/side/top/straps/back/base
C24	Offwhite ink	3750-96BK-raw material-zipper head
C25	Silvery metal	3750-96BK/CR-zipper head
C26	Offwhite plastic	3750-96BK-zipper teeth
C27	Offwhite textile	3750-96BK-zipper cloth
C28	Blue ink	3750-96CR-raw material-top zipper head
C29	Blue textile	3750-96CR-top zipper cloth
C30	Blue plastic	3750-96CR-top zipper teeth
C31	Black plastic	3750-96CR-main/front pocket zipper teeth
C32	Offwhite textile with offwhite PVC backing	3750-96CR-main body/front pocket/side/top/straps/back/base
T1	Navy handbag	Finished product (3750-94NY)
T2	Beige handbag	Finished product (3750-94BG)
T3	Light blue handbag	Finished product (3750-94LBL)
T4	Navy crossbody bag	Finished product (3750-93NY)
T5	Beige crossbody bag	Finished product (3750-93BG)
T6	Light blue crossbody bag	Finished product (3750-93LBL)
T7	Cream Backpack	Finished product (3750-96CR)
T8	Navy Backpack	Finished product (3750-96BK)





### Pictures



#### Sample photo:

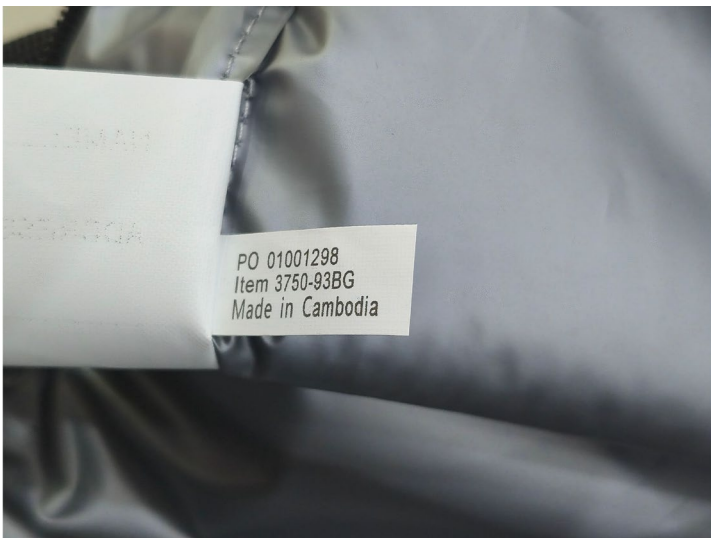



## Pictures

### Sample photo:

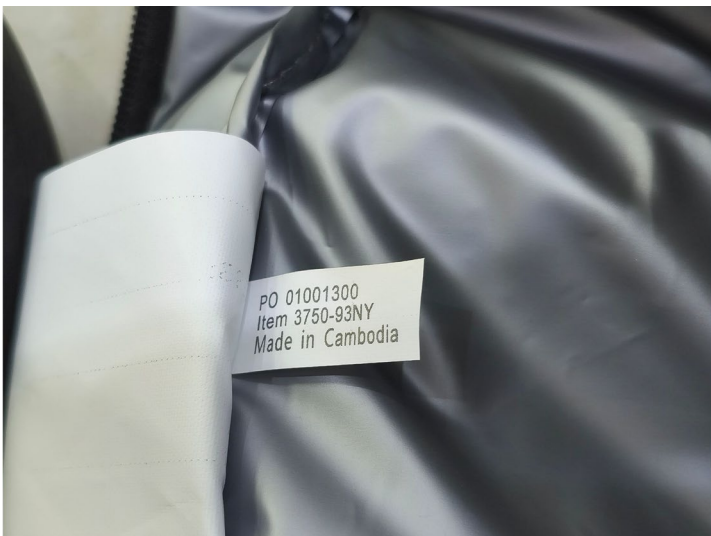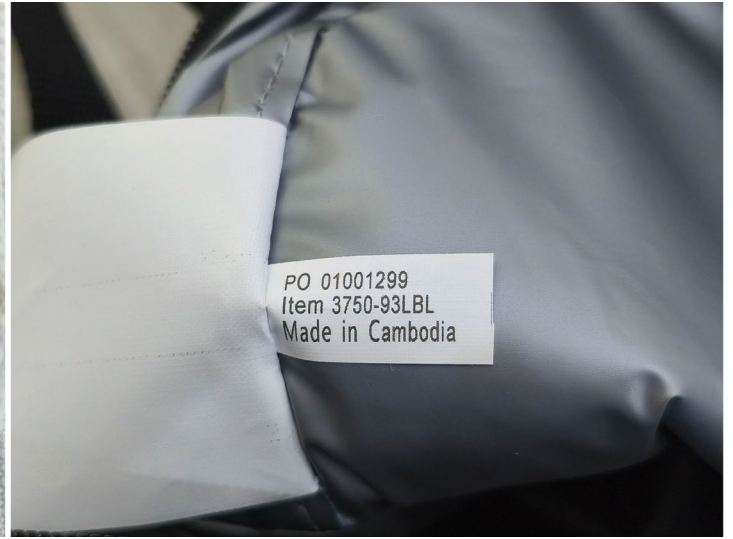

Verify Report



## Pictures

### Sample photo:



End of the report

The test result(s) and conclusion(s) in this report relate only to the sample(s) as received and the method /regulation section(s) tested as described herein. If it is not further specified in the report, the decision rule for stating conformity is based on the QIMA decision rule. (<https://www.qima.com/conditions-of-service#decisionRule>). This test report may not be reproduced in whole or in part, without the written approval of QIMA (Hangzhou) Testing Co., Ltd.



Verify Report